

microSD Card

IUDD33K



The ADATA IUDD33K industrial-grade A1 (Application Performance Class 1) microSD card implements 3D TLC Flash, sports a 3K P/E cycle rating for great reliability. In addition, it also meets the V10 (Video Speed Class) standard for high-quality recording. For excellent data integrity, the IUDD33K supports LDPC ECC (Error Correcting Code) and Wear Leveling technologies. The IUDD33K is ideally suited for applications such as industrial automation, surveillance, POS, healthcare and more.

Features

- Compliant with SD 6.1 specifications
- 3K P/E Cycles – improved endurance and reliability
- Wide-temperature operation: -40°C to 85°C
- Meets V10 (Video Speed Class) standard
- Meets A1 (Application Performance Class) standard
- LDPC ECC Technology
- Supports Wear Leveling, Garbage Collection and Bad Block Management
- Suitable for industrial automation, surveillance, POS, healthcare and in-vehicle applications


Ordering Information

Operating Temp.	64GB	128GB	256GB
-25°C to 85°C	IUDD33K-064GETB5	IUDD33K-128GETB5	IUDD33K-256GETB5
-40°C to 85°C	IUDD33K-064GITB5	IUDD33K-128GITB5	IUDD33K-256GITB5

Specifications

Model	IUDD33K
Form Factor	microSD
Capacity	64GB – 256GB
Interface	SD 6.1
Flash Type	112L 3D TLC
Dimensions (L x W x H)	11 x 15 x 1mm
Sequential Read (Max.)	97MB/s
Sequential Write (Max.)	83MB/s
Speed Class	UHS Speed : Class 1/ Speed Class : Class 10/ Video Speed Class : V10
Operating Temperature (Standard)	-25°C to 85°C
Operating Temperature (Industrial)	-40°C to 85°C
Operating Voltage	DC 2.7V - 3.6V
Power Consumption (Max.)	0.71W
Shock Resistance	1500G/0.5ms, Half Sine Wave
Operating Humidity	5%-95% RH, non-condensing
Vibration Resistance	20G (20-2000Hz)
Technologies	LDPC ECC, Wear Leveling, Garbage Collection, Bad Block Management, S.M.A.R.T. Monitor

Diagram

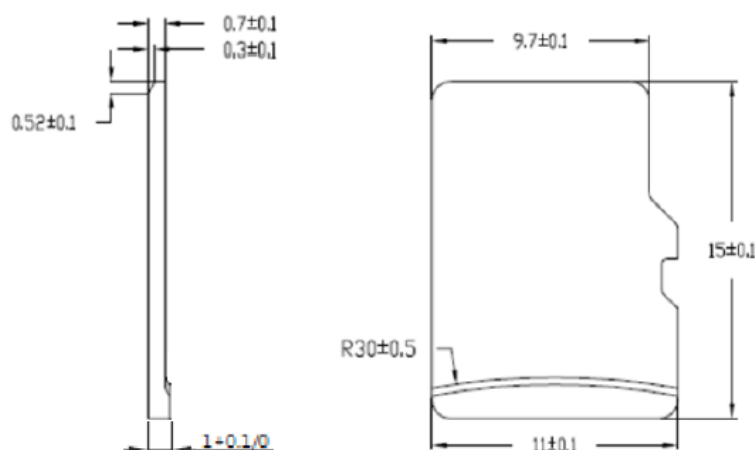

Contact Us

Unit: mm

HQ (Taiwan):

T: +886-8228-0886

E: IA_Global@adata.com

US:

T: +1-714-332-8708

E: IASales_us@adata.com

EU:

T: +49-899-0405-296

E: IASales_eu@adata.com

China

T: +86-21-6233-1010

E: IASales_cn@adata.com

JP:

T: +81-3-5807-0011

E: IASales_jp@adata.com

APAC/MEA:

E: IASales_apacmea@adata.com